


REPAIR SECTION FOR GRAVEL STREET OR DRIVE

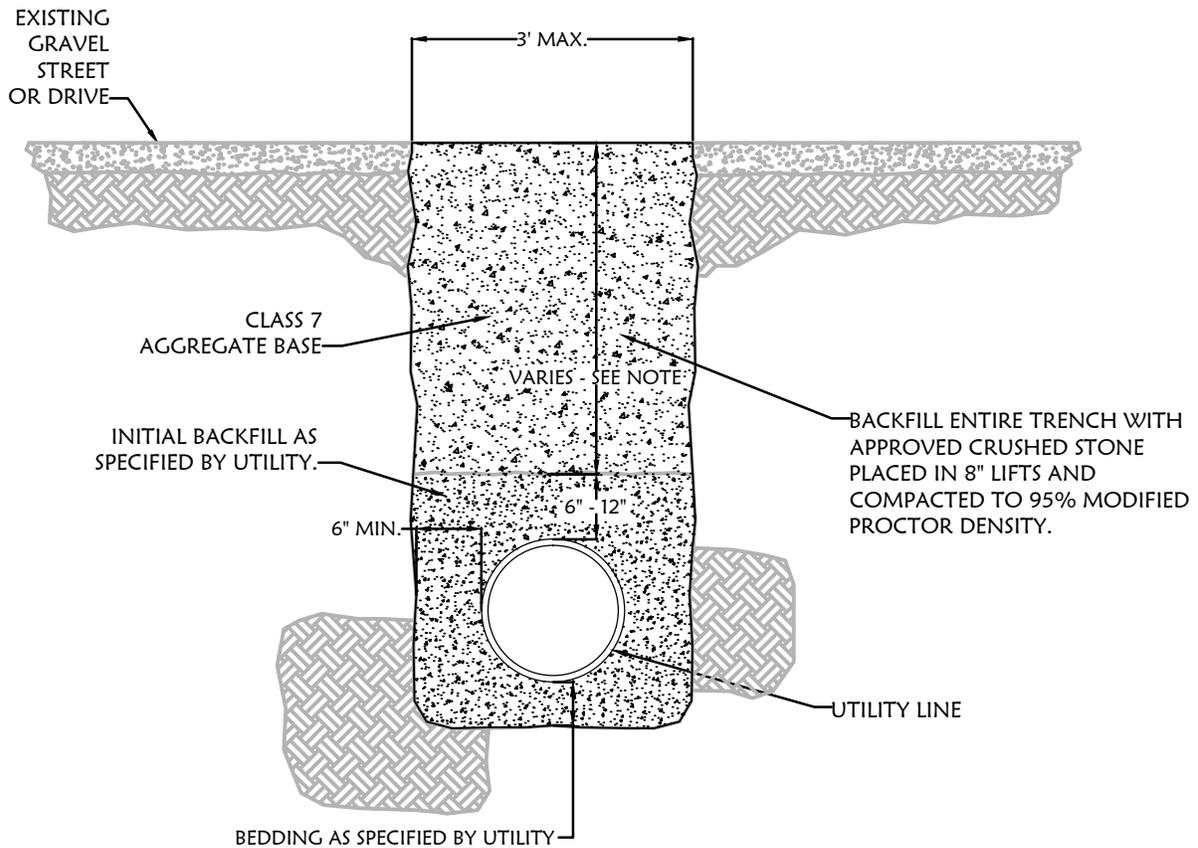

NOTES

1. BURY UTILITIES IN CONFORMANCE WITH FEDERAL, STATE, AND LOCAL REGULATIONS. MINIMUM BURY DEPTH ON CITY OF BELLA VISTA RIGHT-OF-WAY IS TWO FEET (2') UNLESS OTHERWISE APPROVED IN ADVANCE BY STREET SUPERINTENDENT.
2. ALL REPAIRS SHALL BE WARRANTED BY THE CONTRACTOR PER CURRENT CITY OF BELLA VISTA STREET AND RIGHT-OF-WAY EXCAVATION PERMIT MANUAL.
3. FLOWABLE FILL MAY BE USED IN LIEU OF BEDDING, INITIAL BACKFILL, AND/OR CLASS 7 AGGREGATE BASE WHEN APPROVED IN ADVANCE BY STREET SUPERINTENDENT.
4. SURFACE TOLERANCE ON REPAIRS: 1/2", MEASURED USING 10' STRAIGHT EDGE.