


REPAIR SECTION FOR HMAC OR CHIP-SEAL LOCAL STREET OR DRIVE

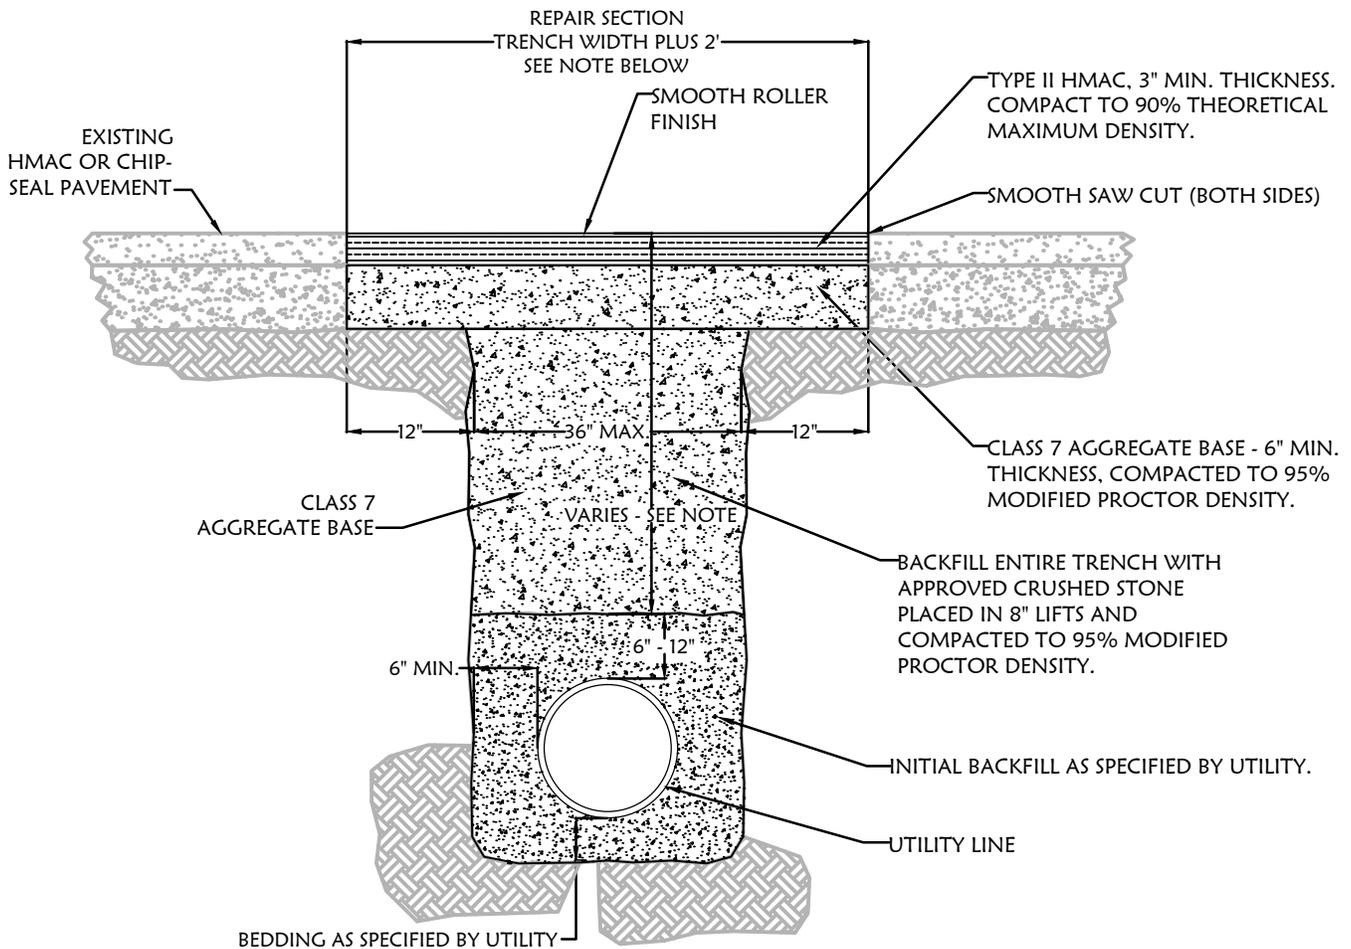

NOTES

1. CONTRACTOR SHALL SAWCUT AND REPLACE PAVEMENT AND BASE TO THE WIDTH NECESSARY TO COVER ANY BREAKAGE, TO THE SATISFACTION OF THE STREET SUPERINTENDENT. MINIMUM WIDTH OF REPAIR IS AS SHOWN.
2. BURY UTILITIES IN CONFORMANCE WITH FEDERAL, STATE, AND LOCAL REGULATIONS. MINIMUM BURY DEPTH ON CITY OF BELLA VISTA RIGHT-OF-WAY IS TWO FEET (2') UNLESS OTHERWISE APPROVED IN ADVANCE BY STREET SUPERINTENDENT.
3. ALL STREET AND DRIVE CUTS SHALL BE TEMPORARILY PATCHED WITH COLD MIX WITHIN 24 HOURS OF BEGINNING OF CUT. TEMPORARY COLD MIX PATCH SHALL BE MAINTAINED BY CONTRACTOR TO THE SATISFACTION OF THE CITY UNTIL PERMANENT REPAIRS ARE MADE.
4. ALL REPAIRS SHALL BE WARRANTED BY THE CONTRACTOR PER CURRENT CITY OF BELLA VISTA STREET AND RIGHT-OF-WAY EXCAVATION PERMIT MANUAL.
5. FLOWABLE FILL MAY BE USED IN LIEU OF BEDDING, INITIAL BACKFILL, AND/OR CLASS 7 AGGREGATE BASE WHEN APPROVED IN ADVANCE BY STREET SUPERINTENDENT.
6. SURFACE TOLERANCE ON REPAIRS: 1/4", MEASURED USING 10' STRAIGHT EDGE.